

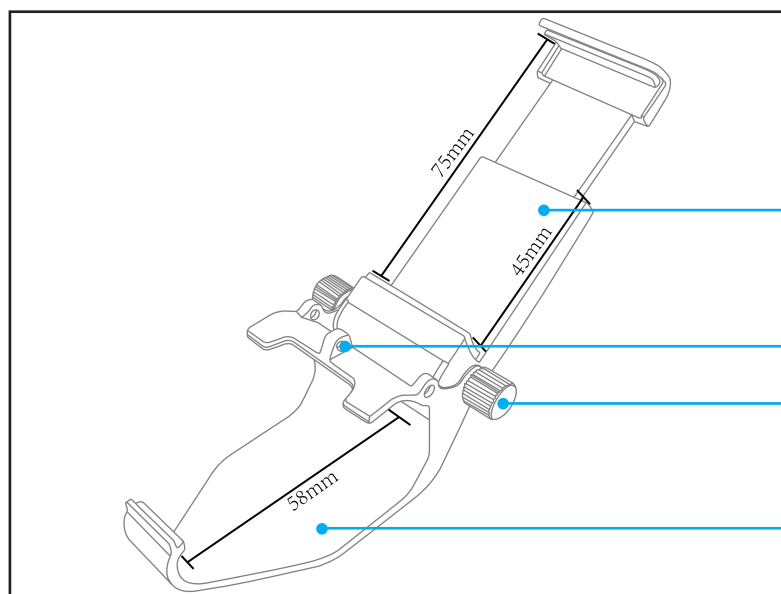


## T8S 手机和FPV屏幕支架使用说明


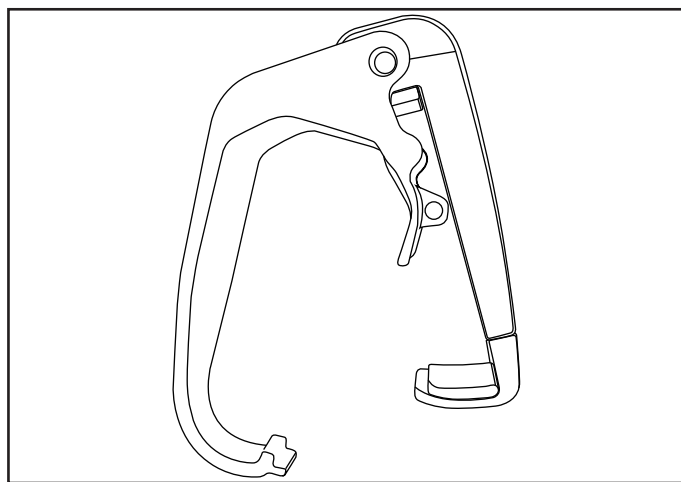


### 使用方法:





- 1.取出支架和红色螺丝配件。
- 2.将2个塑胶件按下图方法扣合在一起。

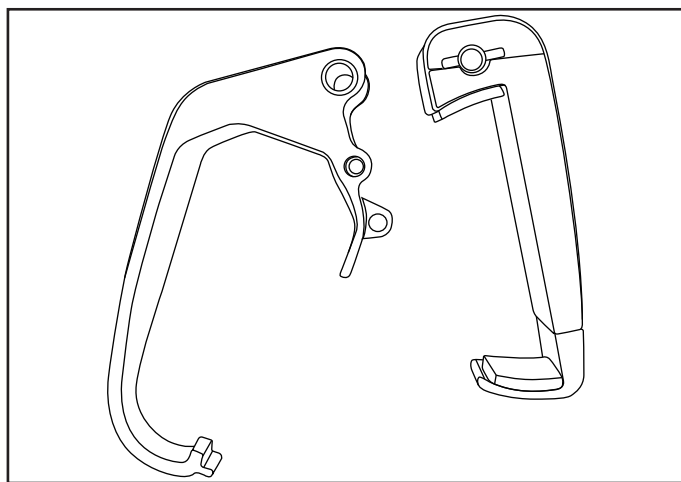


- 3.将两颗红色螺丝分别插入支架两侧的螺丝孔, 然后顺时针方向拧左右两颗螺丝,注意此时先不要彻底拧紧螺丝,需预留一点位置,待调整好支架角度之后再拧紧螺丝,稳定支架。

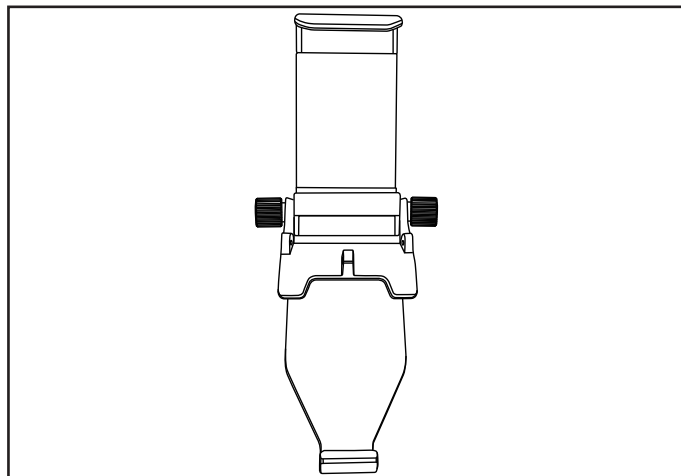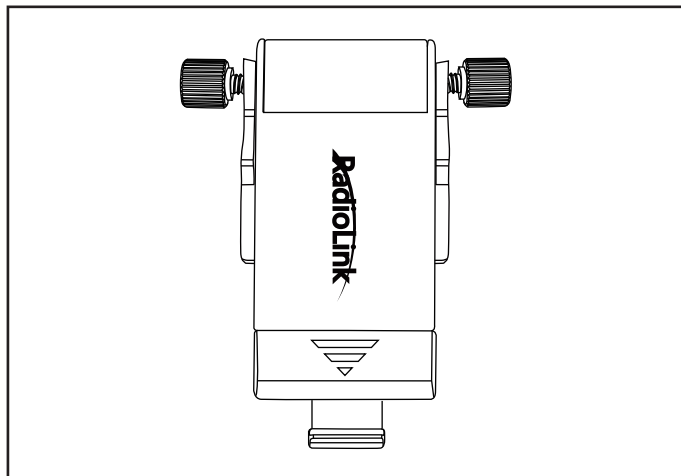

4.按照下图将支架安装到T8S遥控器上,即安装完成。

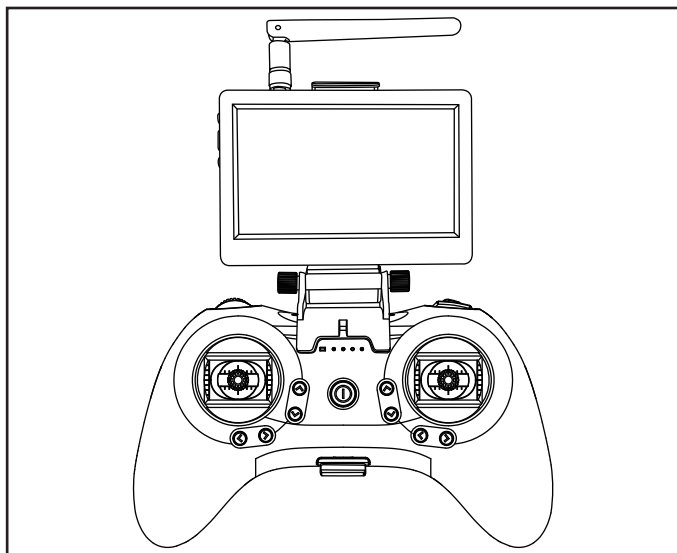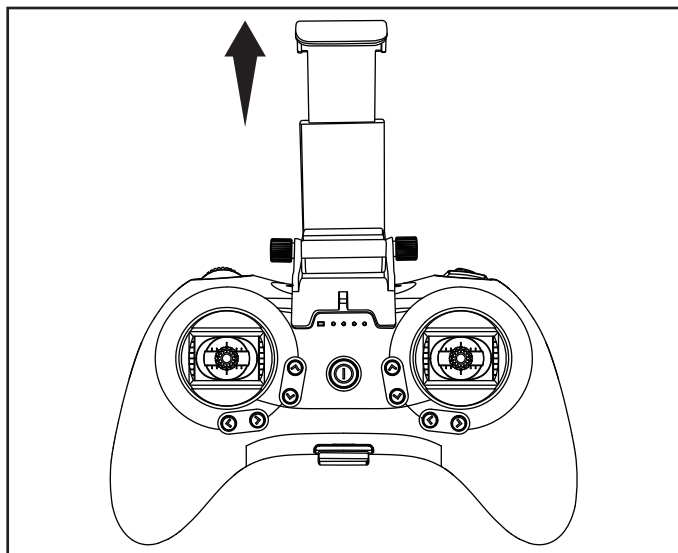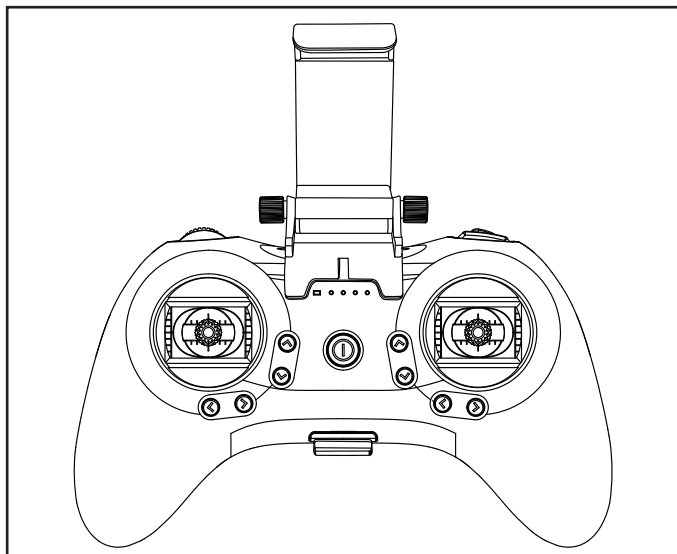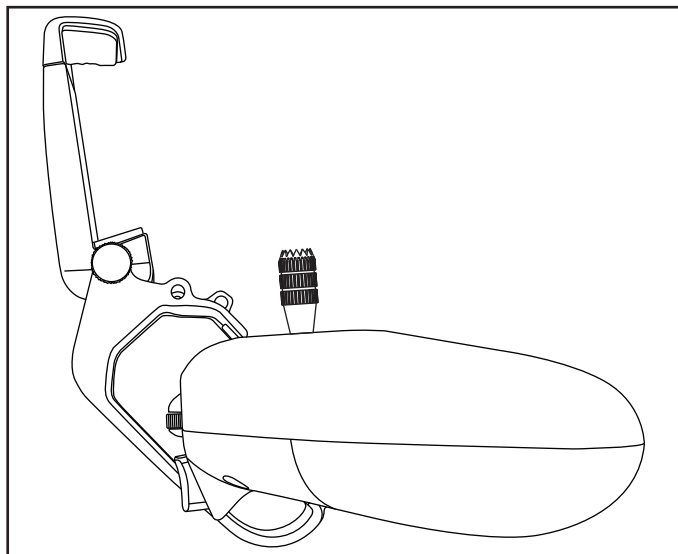


5.如需从T8S上取下支架, 请从支架下方取出支架, 切勿直接从夹屏幕的这一端直接掰下支架, 这样容易损坏支架。

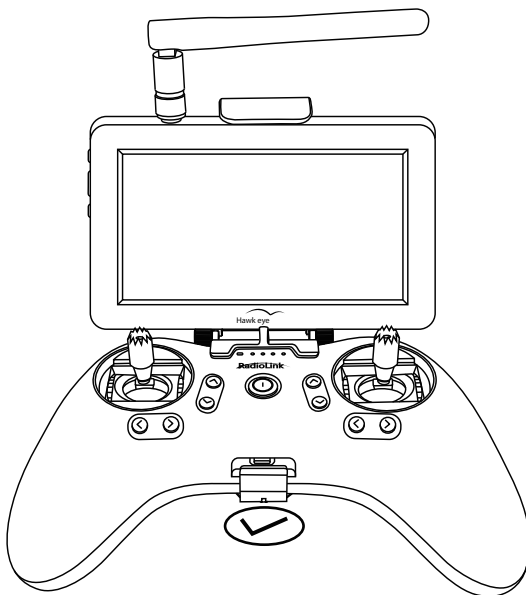

温馨提示:

- 1.仅适用于乐迪T8S遥控器。
- 2.支架装置手机或者屏幕时请不要用力左右摇晃,避免将手机或者屏幕甩出。



## T8S Mobile/FPV Monitor Holder Instruction

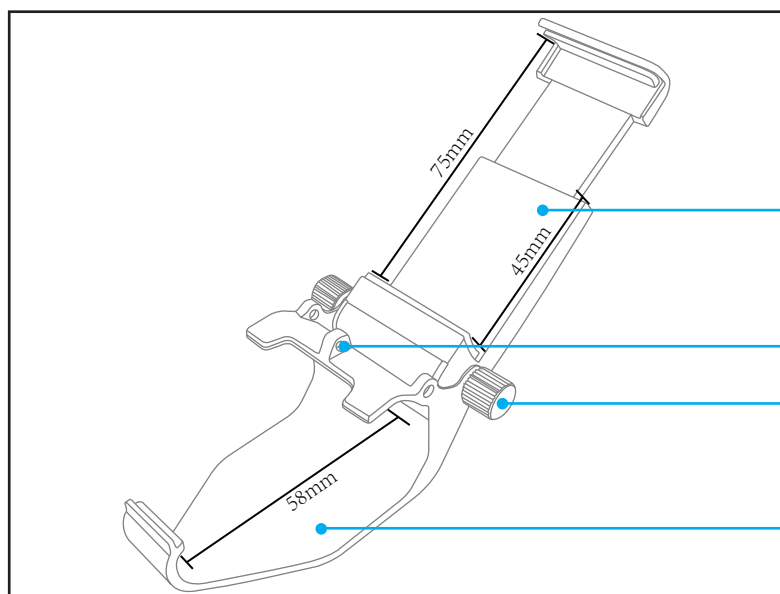



- ① Mobile/FPV monitor holder  
(Size:45mm/1.77"-75mm/2.95")
- ② Lanyard Hole
- ③ Install the screws and adjust the  
monitor angle(90° or 135°)
- ④ T8S holder (Size: 58mm/2.28")

### Instructions:


- 1.Take out the holder and red screws accessories from the box.
- 2.Install the 2 plastic parts as shown below.

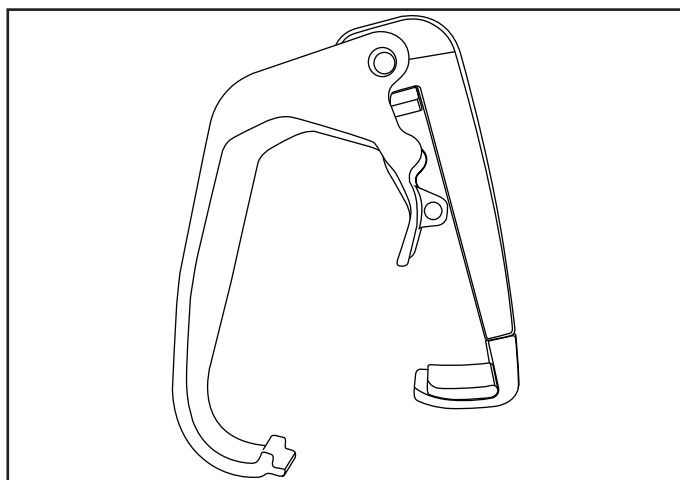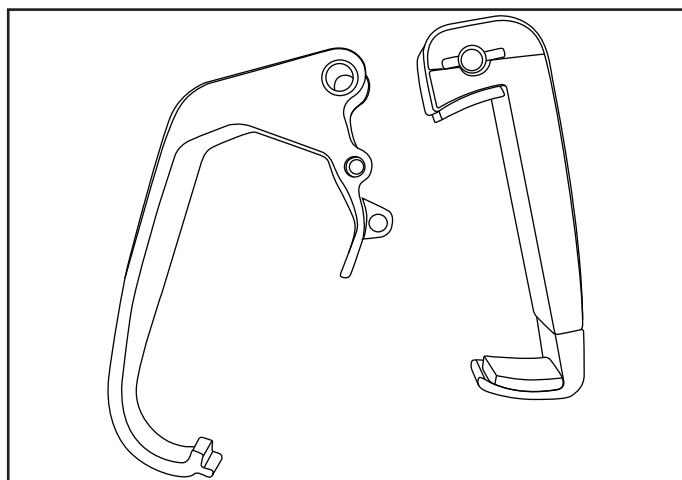


- 3.Use the two red screws to twist through screw holes on both sides of the holder in a clockwise direction. Be careful not to tighten the screws at this time. After adjusting the angle of the holder, you can tighten the screws to stabilize the holder.

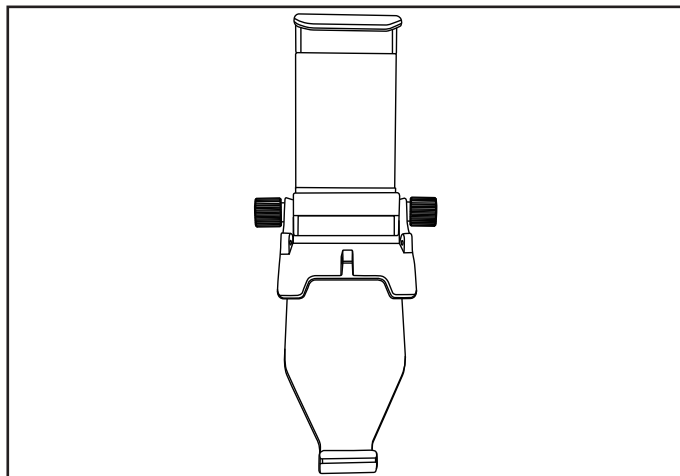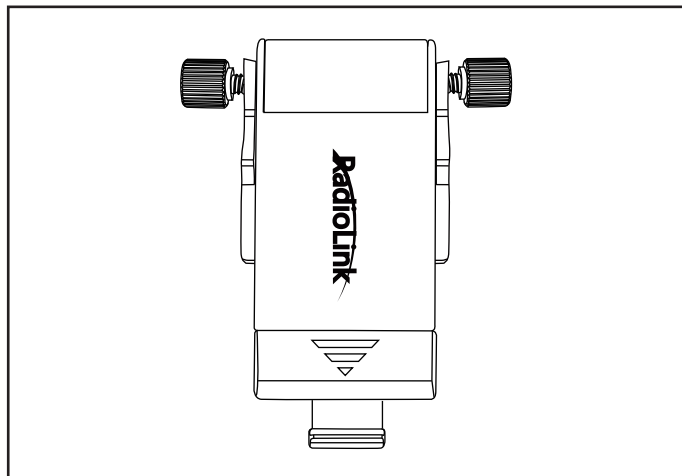

4. Install the holder on the T8S transmitter as shown below, and the installation is complete.

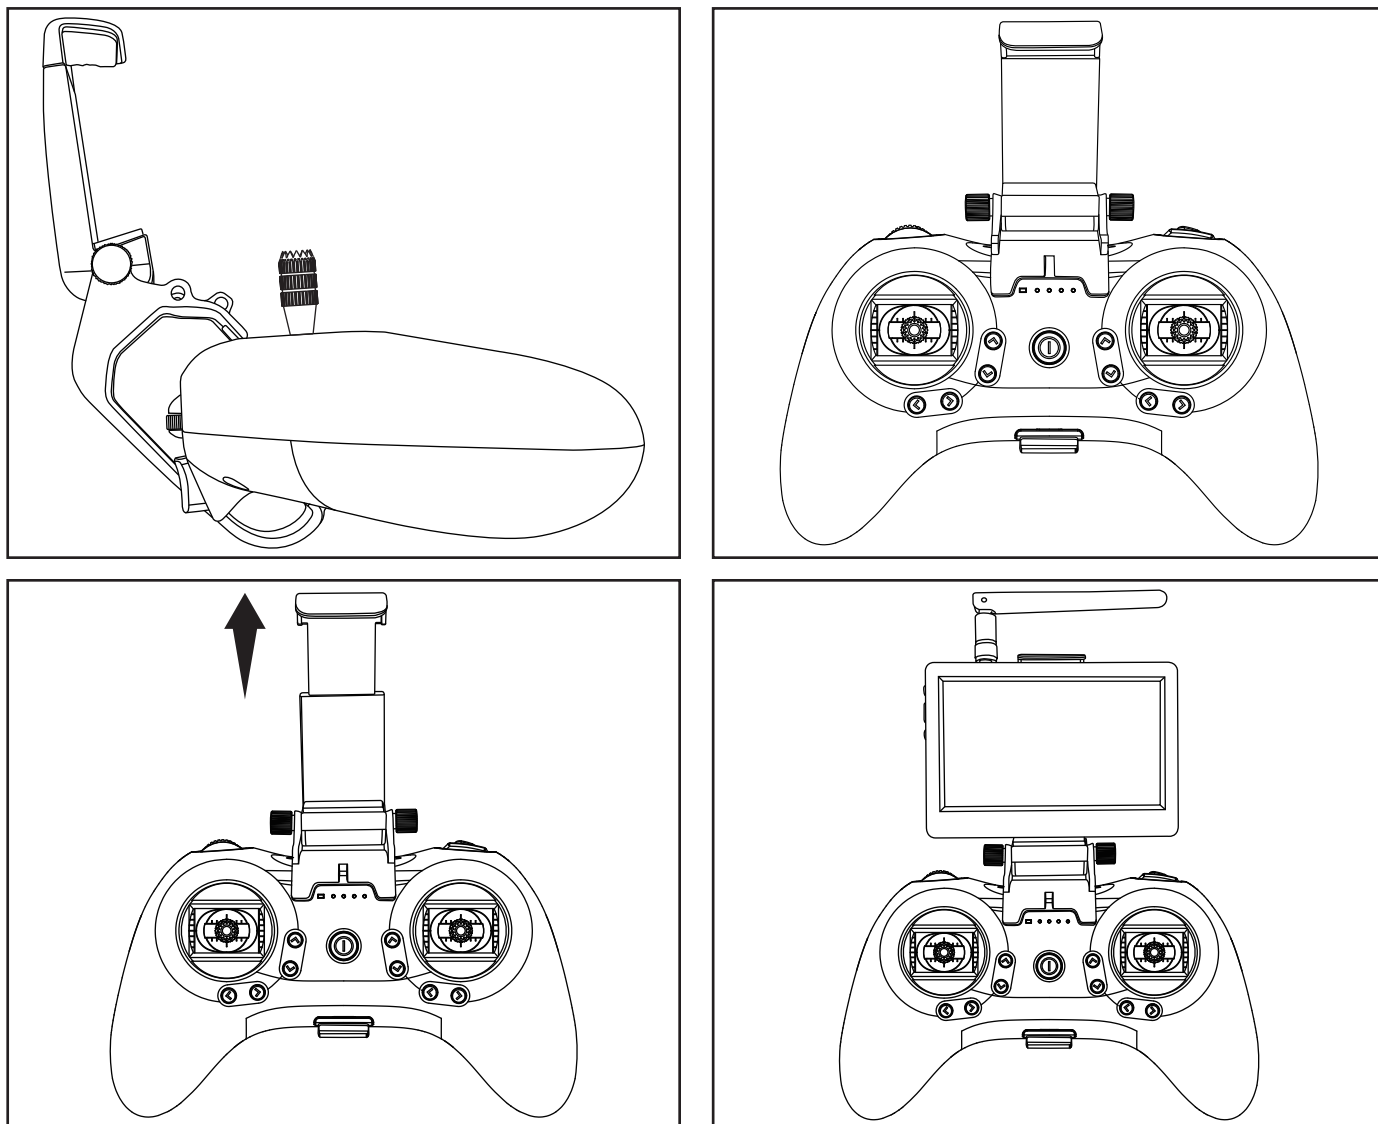

5. To remove the holder from the T8S transmitter, please take out the T8S from the bottom of the holder. Do not take out the holder from the position where the monitor is clamped to avoid damaging the holder.

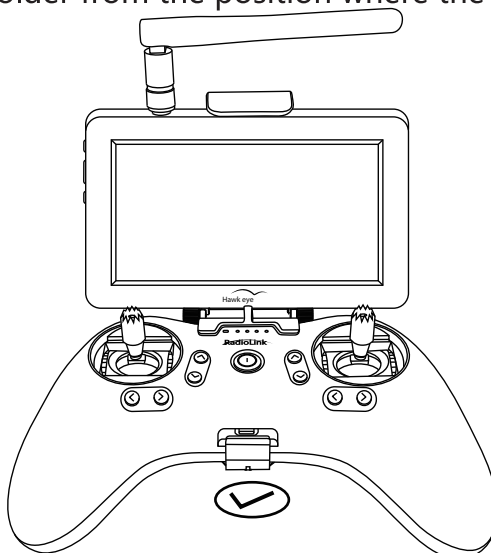

## Note

1. Only compatible to RadioLink T8S Transmitter.
2. Avoid shaking the holder when mobile or screen is used in case of dropping.